



rite L edge

RITE-L-EDGE aluminium landscape edging and paver restraint...

Welcome to an easier life with the Rainbow Rite-L-Edge aluminium landscape edging system. Rainbow has been supplying quality aluminium lawn and border edging since the late 1990's. Rainbow's aluminium landscape edging has been designed with both the landscape architect and installer in mind. The 'L' shape section is designed to be easy to install and to last a lifetime, Rainbow's Rite-L-Edge landscape edging is the perfect choice for your next landscape edging project. Used with asphalt, paving slabs, blocks paving, resin bonded or loose gravel surfaces Rite-L-Edge is the ultimate choice in landscape edgings.








Product features:

- Durable extruded aluminium 6063 alloy
- 'L' shaped section for added strength
- Strong, but flexible with high retaining properties
- Tough, extra strong steel fixing pins
- Quick and simple joining system
- Maintains a crisp, clean defined edge

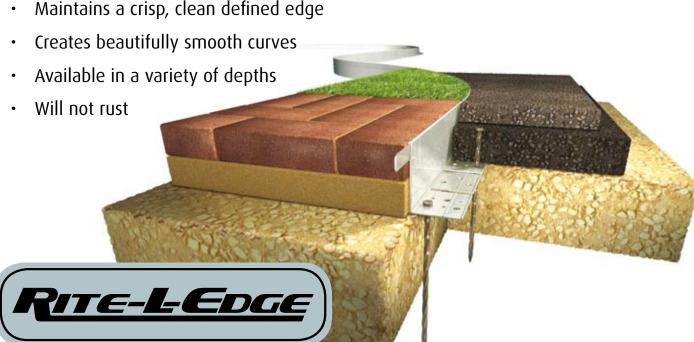

Metal edgings are rapidly becoming the preferred choice over the more traditional edging systems such as concrete kerbs due to the cleaner and more pleasing lines that can be achieved. Rite-L-Edge is a heavy duty 'L' shaped section extruded from durable aluminium 6063 alloy and is the first choice in metal landscape edgings for specifiers and contractors due to its versatility, strength, speed of installation and cost effectiveness. Available in a variety of depths the use of Rite-L-Edge aluminium landscape edgings will enhance any project.

Applications:

- Asphalt
- Wetpour
- Self binding gravel
- Resin bound
- Loose gravel
- Concrete
- Resin bonded surfaces















Rainbow Professional is committed to supplying quality edging materials that allow for quick and easy installation giving clean lines at a cost effective price. Whatever your application we are dedicated to providing you the edging you need to save time, effort and money.

Product Specification

Product Code	Piece Length	Pieces per Pack	Metres per Pack	Vertical Depth	Base Width	Visible Thickness	Min. Radius	Finish	Min. Stakes per Metre	Weight per Pack
C570	2.438m	50	121.9	18mm	30mm	5mm	560mm	Mill	3	29.9kg
C571	2.438m	28	68.26	25mm	50mm	5mm	560mm	Mill	3	29.5kg
C572	2.438m	22	53.64	38mm	50mm	5mm	560mm	Mill	3	28.5kg
C573	2.438m	19	46.32	50mm	50mm	5mm	560mm	Mill	3	28.5kg
C574	2.438m	17	41.45	64mm	50mm	5mm	560mm	Mill	3	28.5kg
C575	2.438m	13	31.69	75mm	75mm	5mm	815mm	Mill	3	29.5kg
C576	2.438m	10	24.38	100mm	75mm	5mm	815mm	Mill	3	27.5kg
C579	2.438m	8	19.5	150mm	70mm	8mm	815mm	Mill	3	27.5kg
C537 (pins)	255mm	250	-	-	-	-	-	Steel	-	22.7kg

Distributed by:

